

Blockout Lamination

BLE



Product Certificate

Fire, Smoke Classification	FR (US) - NFPA 701 TM#1	B1(CN) - GB17591	
Health & Safety	Oeko-tex Standard 100 class IV	RoHS - lead Free	Greenguard® Gold
	Reach 1907-2006 SHVC	GB18586 - 2001	EN71 Part 3:1994
Colour fastness to light	Grade 6 ISO105 B02:2014		
	≥4.0 AATCC TM 16.3-2014; Option 3; Xenon Arc Lamp		
Warranty	3 Years		




Technical Data


STYLE		BLE
Composition		35% Fiberglass -65% PVC
Openness Factor		≈0%
UV Screen		Up to 100%
Width	inch	98"
	cm	250
Weight (ISO 2286-2)	oz/yd ²	14.16±5%
	g/m ²	480 ± 5%
Thickness (ISO 2286-3)	inch	0.013 ± 5%
	mm	0.34 ± 5%
MECHANICAL RESISTANCE		
Breaking (ISO 13934-1)	Warp	≥ 2300 N/5cm
	Weft	≥ 2100 N/5cm
Tear (ISO 4674)	Warp	≥ 25 N
	Weft	≥ 25 N
Packing (Roll Length)		32.8 yards
		30 lm

Colour


BLE

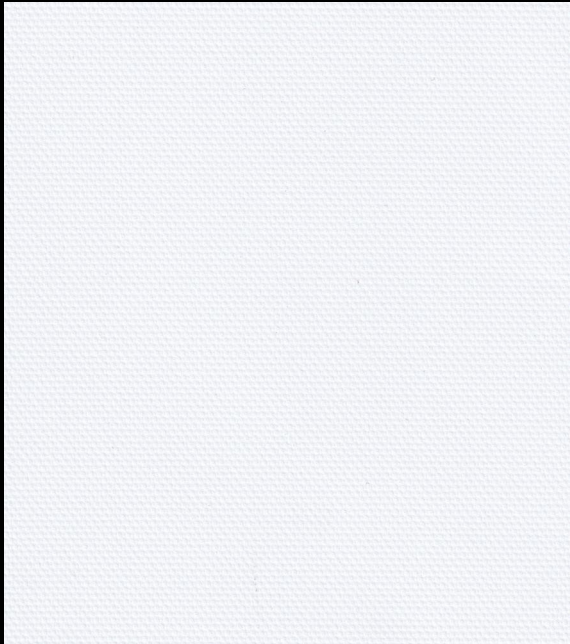


1002 White

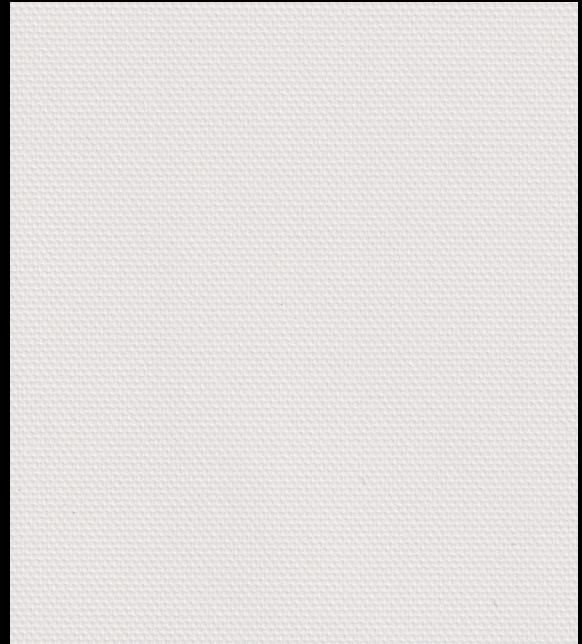

2003 Beige

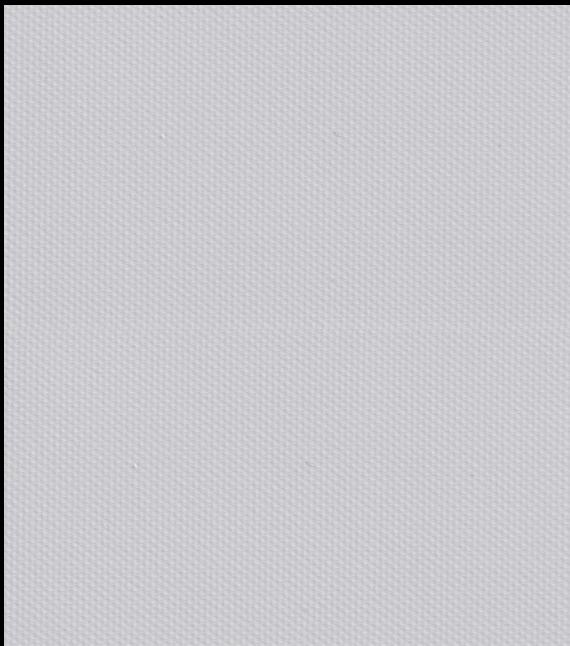

3002 Pearl

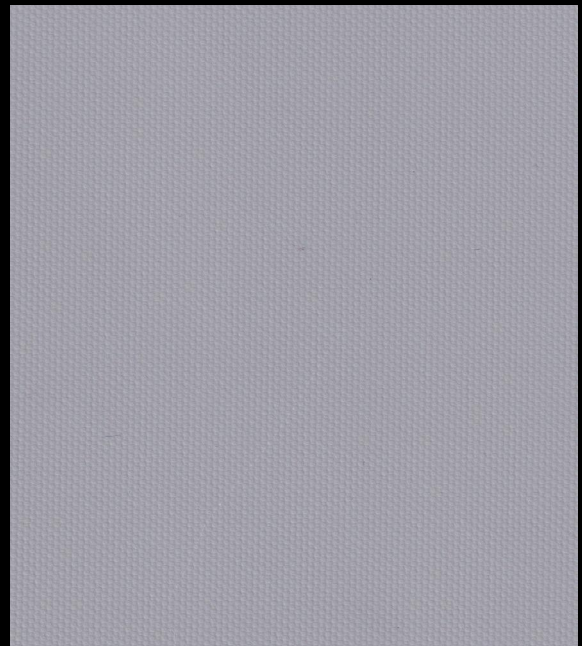

3033 Grey



Hande[®]

Guangzhou Hande New Materials Co.,Ltd

Add: No.161, Yao TianHe Street,Yong shun Avenue,Yonghe Economic Zone,
GZ Economic&Technological Development District, Guang zhou, China

Tel: 86-20-32226319 Fax: 86-20-32222205 PostCode: 511356

Email: info@handegroup.com.cn

Web: www.handegroup.com.cn